



SolarEdge Commercial Storage System CSS-OD 197



Go big

The SolarEdge CSS-OD 197 is a 197 kWh-rated commercial and industrial energy storage solution for indoor or outdoor deployment. It scales to 4 MWh per site, serving the needs of a wide variety of applications.

Slash energy costs and maximize solar energy ROI

The system helps PV system owners maximize the ROI of their investment with integrated system intelligence and multiple energy optimization modes that slash energy costs.

Advantages



High energy density and scalability



Comprehensive safety



Cyber security



Peace of mind



Integrated intelligence for maximum savings




Seamless installation and commissioning

High energy density

The CSS-OD 197 cabinet provides 197 kWh of storage capacity in just a 2 square meter footprint. This enables asset owners to deploy the storage capacity they need in space-efficient configurations.

The system scales to 20 cabinets per deployment, for up to 4 MWh of storage. It is available with 50 kW or 100 kW of inverter capacity, so installers and system operators can choose the maximum C-Rate (0.5 or 0.25) that best aligns with their needs.

Scalable to 4 MWh

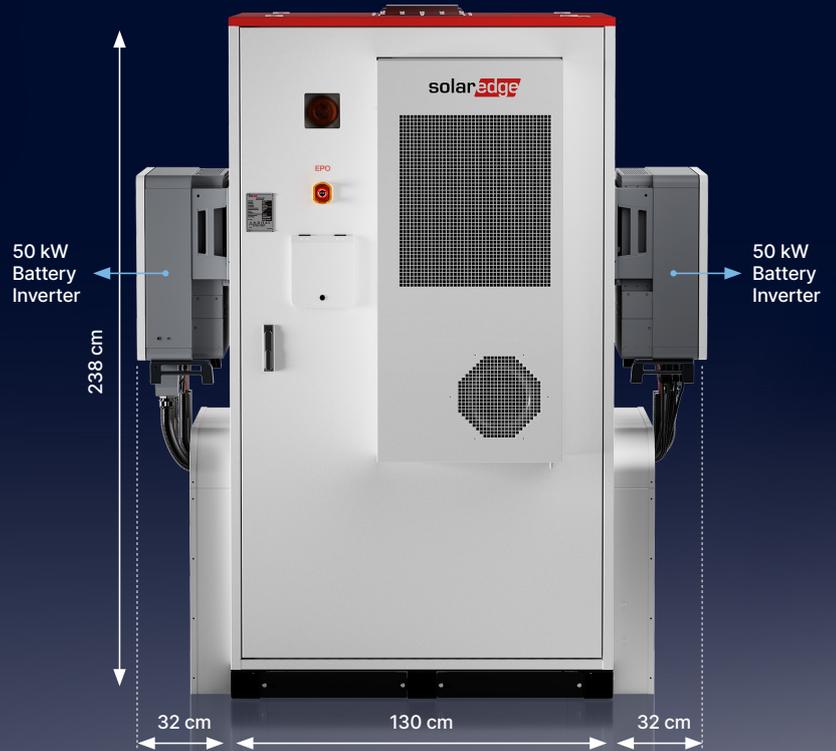

Comprehensive safety

A multi-layered approach to battery protection

The CSS-OD 197 is engineered with multiple, integrated safety features that are designed to detect and address potential threats at four distinct levels: cell, module, cluster and cabinet.

Protection Pillars	Safety Mechanism	Location of Safety Mechanism			
		Cell	Module	Cluster	Cabinet
 Thermal Runaway prevention	Cell Passive Balancing	✓	✓	✓	
	Cell Temperature Sensors	✓			
	NOVEC 1230		✓	✓	
	CO Detector				✓
	Smoke Detector				✓
	Heat and Humidity Sensor				✓
	Fire Extinguishers 1 and 2				✓
	Fire-fighting Valve				✓
	EPO (Emergency Power-off)				✓
	Pressure-relief Valve				✓
	Pressure Relief Panel				✓
 Electrical Safety	DC Relay			✓	
	DC Breaker (MCCB)			✓	
	Reverse Polarity Protect.				✓
	DC Busbar Temp. Sensing			✓	
	DC Surge Protection Device			✓	
	AC SPD (HVAC AUX)				✓
 Enclosure Protection	Flood Detector				✓
	Cell Physical Enclosure		✓		
	HVAC System				✓
	Door Switch				✓
	Ingress Protection				✓
Acoustic Visual Alarm				✓	



Cyber security

The system connects to the cloud via the SolarEdge ONE Controller for C&I, an onsite device designed to provide integrated cyber defenses and secure communications for the battery and other elements of a site's solar energy infrastructure.



Peace of mind

The system is backed by an extensive performance warranty that guarantees 70 % SoH for 8000 cycles or 10 years. It has a powerful, air-cooled HVAC system that keeps internal components operating within an optimal temperature range over a wide range of external temperatures.




Integrated intelligence

The CSS-OD 197 comes with an integrated set of SolarEdge applications that accelerate and optimize system deployment and management.


1 SolarEdge Designer

Recommends the optimal deployed CSS-OD storage capacity for maximum system ROI, according to site characteristics such as installed solar capacity and energy consumption patterns.

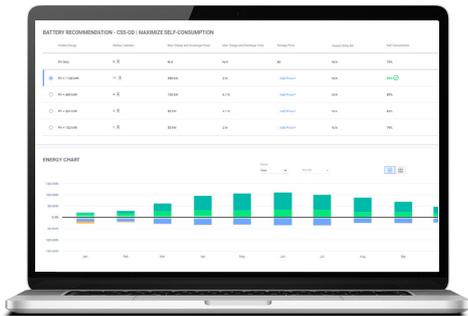


2 CSS-OD Local Interface

Located on the front of the system cabinet, the Local Interface is a user-friendly touch-screen with a step-by-step wizard and error diagnostics that enable smooth on-site installation, configuration, and maintenance.

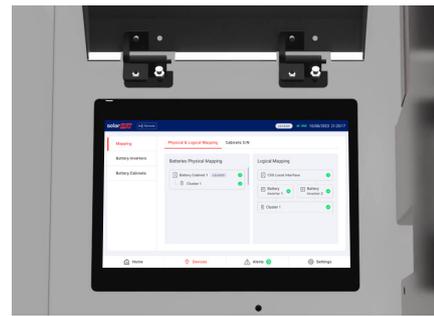


4 SolarEdge ONE for C&I

A cloud-based energy optimization platform that provides advanced, monitoring and management of a site's entire energy footprint. It supports multiple energy optimization modes including maximized self-consumption, peak shaving, tariff optimization, export and import limits.

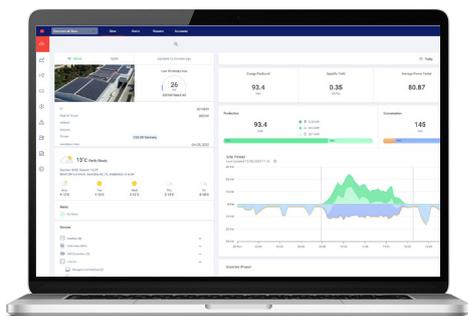

3 SolarEdge Go

A mobile application that enables remote CSS-OD commissioning and connection of related site devices, such as ONE Controller for C&I and inverters. Go has a user-friendly, step-by-step wizard and error diagnostics that enable smooth remote system configuration.

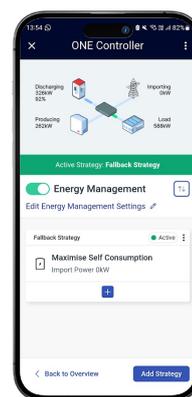

CSS-OD 197 vs other 200 kWh-class solutions

Parameter	SolarEdge CSS-OD 197	Competitor A	Competitor B	Competitor C	
Scalability	3.94 MWh/1 MW (50) 1.97 MWh/1 MW (100) (up to 20 units)	3.91 MWh/1.87 MW (up to 15 units)	Not stated	2.25 MWh/1.1 MW (up to 10 units)	
Supported C-rates	0.5C and 0.25C	0.5C	0.5C	0.5C	
Warranty	10 years 5 years: A/C, Fire D&S, SPD Battery performance: 8000 cycles, or 10 years @ min. 70% SoH	5 years 2 years: liquid-cool & fire supp	10 years Battery performance: 7300 cycles or 10 years @ min 60% SoH	5 years Extended warranty available Battery performance: 6500 cycles or 10 years @ min. 70% SoH	
Cooling method	Cabinet and PCS: Air cooling Simple, lower maintenance	Hybrid liquid and air cooling Complex, higher maintenance	Hybrid liquid and air cooling Complex, higher maintenance	Intelligent liquid cooling Complex, higher maintenance	
Operating temp. range: (Deg C)	-30 to +50 (Derating > 45)	-25 to +55 (Derating > 45)	-30 to +55 (Derating > 50)	-30 to +50 (Derating >45)	
Cabinet weight (kg)	2428-2496	2,580	2,800	3100	
Cyber protection	Yes via SolarEdge ONE Controller (cyber gateway)	Not stated	Not stated	Yes, via controller	
Software suite	Battery sizing and design optimization	Yes via SolarEdge Designer platform	Not stated	Yes	Not stated
	Battery commissioning and configuration	Yes via SolarEdge Go app	Not stated	Yes	Not stated
	O&M and energy optimization	Yes	Yes	Yes	Yes

* This competitive analysis is provided for marketing and informational purposes only and is based on publicly available information as of 01/26.