

Better Sub-Metering Solution

DDSU666-CT

Single Phase Smart Meter

CHINT

CHINT METER



- ◎ MID B+D Certified
- ◎ Multi Parameter measurement
- ◎ Modbus-RTU Communication
- ◎ Din Rail Mounted




HIGH ACCURACY



LOW CONSUMPTION



LARGE LCD DISPLAY



EASY TO INSTALL

MID CE



CHNT

CHINT METER

DDSU666-CT

Single Phase Smart
Meter

SPECIFICATIONS

Measurement

- Compliance with EN 50470-1/-3 standard
- Connection type: 1P2W
- Accuracy: CT: Class C/ 0.5S
- Constant: CT:6400imp/kWh

Voltage

- Nominal Voltage(Un): 220V...240V
- Operating Range: 0.9Un~1.1Un

Current

- CT: 0.015-1.5(6)A

Frequency

- 50Hz or 60Hz

LCD Display

- 6 characters of 7 segment display
- Digital size: 5.9mm × 12.4mm

LED Indication

- Pulse Output

Communications

- RS485,Modbus-RTU
- Baud Rate:1200bps,2400bps,4800bps,
9600bps(default),19200bps

Measured Values

- Import/Export kWh, kvarh
- Instantaneous kW, kvar, kVA
- Irms, Vrms, Frequency, Power factor, etc


Environmental

- Operating Temperature : -25 °C to +55 °C
- Storage Temperature : -35 °C to +70 °C
- Relative Humidity: ≤ 95%RH(non-condensing)
- Ingress Protection: IP20


Dimensions

- Dimensions:100mm ×36mm ×65.5mm
- Weight: 0.22 kg (Approx.)

WIRING DIAGRAM



METER DIMENSIONS

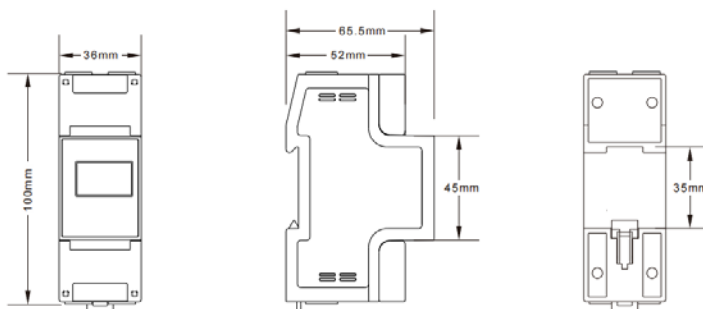

Units: mm

Zhejiang Chint Instrument & Meter Co., Ltd

Add: No.560, Yueming Road, Binjiang District, Hangzhou, Zhejiang, China P.C: 310052 Tel: +86-571-56977777

Fax: +86-577-62919588 E-mail: chintmeter@chint.com

Website: <http://en.chintim.com/>

*All rights reserved. Specification and technical data are subject to change without notice. Please contact us to confirm relevant information on ordering.