

PRODUCTSHEET

ALP DC MAXI

160 / 240 / 320 / 400

ULTRA
RAPID EV
CHARGING
POINT



MORE POWER FOR QUICK STOPS AND RELIABLE CHARGING

Alp DC Maxi ultra rapid charging point for electric vehicles enables scalable and retrofittable power levels 160-240-320-400 kW.

It has a modern designs, proper full branding and customization, and user-friendly interface. The modular design increases charger utilization and ease of operation and maintenance.

www.alp-ev.com

ALPEV
Taking charge of e-mobility

ALP DC MAXI

Highlights



Charging power up to 400kw with liquid cooled cable system for continuous 500 A



MID Certified DC meter



Remote load management via OCPP



Connection to IT backends via OCPP 1.6J



DC charging of two electric vehicles in parallel



Ready for ISO 15118



Online via cellular, Wi-Fi and Ethernet



Interaction via 17" touch display




ALP DC MAXI

Highlights

Contactless Payment with credit card reader

Beside RFID card, QR code and mobile payment method, optional credit card reader is placed on Alp DC Maxi. This gives the charge point operator more possibilities to install fast charging stations.

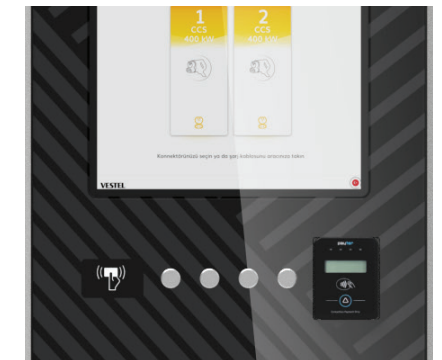

Big and clear interface for user interaction via touch screen

User interaction is key. Therefore, the Alp DC Maxi has seamless 17" touch screen options. The restrictive touch technology makes it possible to use the screen even in tough weather conditions or with gloves.

Large and easy to use foiling area for your own branding

Your brand should be standing out and visible for everyone. This is why the Alp DC Maxi has a big and easy foiling area on the front for full branding and customization. Optionally you can order the product turnkey ready in your corporate design which includes a complete foiling of the product.



Vandal-proof metal body



Easy Installation & Service



Remote SW update over OCPP



Remote Diagnostics over OCPP



Upgrade Ready

ALP DC MAXI

Highlights

General information

Charging mode	DC, mode 4
Number of charging points	1 or 2
Charging connector	CCS2 cable
Cable length	4.5 or 6m
IT backend connection	OCPP 1.6 JSON
Authorization	Free mode, RFID, OCPP remote
Measurement	MID DC Meter (Optional)

Mechanical details

Mounting type	Base mounted
Enclosure material	Metal panel
Cable Management (Optional)	Hydraulic Arm
Dimensions (HxWxD)	2101 x 846 x 982 mm
Package dimensions (HxWxD)	2300 x 1000 x 1090 mm
Weight	650 kg, 780 kg (with packing)

Electrical data

Max Output Power	40 kW Power Module; 160-240-320-400 kW Options (Upgradeable on site)
Input Rating	400 kW: 400 Vac ±10%, 50/60 Hz, 612 A 240 kW : 400 Vac ±10%, 50/60 Hz, 370 A
Output: Voltage	200 - 920 Vdc
Output: Current	Max 500 A (continuous 500A with cooled cable) Max 500 A (nominal 300A with uncooled cable)
Power factor, efficiency	> 0.98, > 95 %
Stand-by power consumption	< 100 W
Earthing system	3L+N+PE (TN, TT)
IEC Protection Class	Class I
Internal Protections	Residual current sensing, Insulation monitoring, Over current, Over voltage, Under voltage, Short circuit, Over temperature, Surge Protection

ALP DC MAXI

Highlights

Connectivity

Communication interface to IT backend	Wi-Fi, ethernet, cellular (2G/3G/4G)
Protocols for communication with IT backend	OCPP 1.6 JSON
Authentication methods	RFID, credit card terminal (optional)
User Interface	High brightness resistive touch screen
Display	17” Color TFT LCD (4:3)

Certification

IP protection class	IP 54
Impact resistance	IK 10
Approvals	CE, RoHS, REACH, GPSD, WEEE
Standards	IEC 61000-6-2/3, IEC62196-1/3, IEC 61851-1/23/24 ISO 15118-1/2/3, DIN 70121

Environmental conditions

Environmental operating temperature	-35°C to + 50 °C (Derating is applied over + 40 °C) -20°C to + 50 °C (Payment Terminal equipped models)
Humidity	5 % - 95 % (Rel. humidity, non-cond.)
Cooling	Forced air cooling Fan
Areas of use	Internal & External areas
Operating altitude above sea level	0 - 2000 m

Highlights

Technical drawing of the ALP EV charging station showing dimensions:

- Width: 816.6
- Height (to top of screen): 866.4
- Height (to top of charging cable): 1117
- Height (to top of unit): 2112

RJ45 Male Connector

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

CHARGING SOLUTIONS

Carefree electric driving with
the smartest charging solutions



Leursebaan 266, 4814 RE Breda, The Netherlands

sales@alp-ev.com | +31(0)85-2465771



www.alp-ev.com



Distributeur: VDH Solar Groothandel B.V.

Finlandlaan 1, 2391 PV Hazerswoude-Dorp, Holland

+31 (0)172 235 990 | info@vdh-solar.nl | www.vdh-solar.nl