

PRODUCTSHEET

ALP DC SAT

Ideal for high-demand environments

PERFECT
FOR PUBLIC OR
COMMERCIAL
SPACES



THIS STATE-OF-THE-ART CHARGING STATION PROVIDES RAPID CHARGING AND SMART MANAGEMENT OF RESOURCES

www.alp-ev.com

ALPEV
Taking charge of e-mobility

ALP DC SAT


Highlights



720 kW Power Cabinet




27" user interface and advertisement screen



Up to 8 socket with 4 dispenser



Advanced cable management system



Dynamic Load Balancing between sockets



Optimal solution for quick charging



ALP DC SAT


Highlights

Designed to efficiently charge heavy electric vehicles such as trucks and buses, Alp DC Sat charging station takes up minimal space, making it an ideal solution for high-demand fleets and urban environments.



With a large 27-inch screen, our charging station offers a seamless user interface for easy navigation, along with a built-in advertising feature to maximize engagement, all while meeting barrier-free access regulations. It also supports multiple payment methods and is fully compliant with AFIR (Alternative Fuels Infrastructure Regulation) standards for enhanced convenience and regulatory alignment.

The advanced cable management system and ergonomic gun holder design ensure effortless cable extension over long distances, providing the user with enhanced comfort and ease of use for optimal performance.

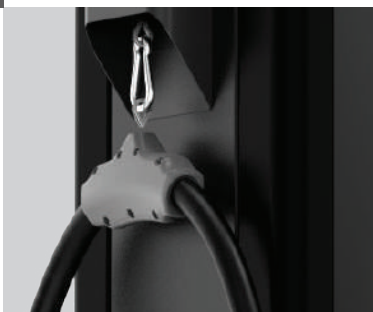

ALP DC SAT

Highlights

General information	
Charging Mode	DC, Mode 4
Number of charging points	1 or 2 for single dispenser unit (Single power cabinet supports 4 dispenser unit)
Charging Connector	CCS2 cable
Cable Lenght	5.50 m with cable retraction unit
	4.20 m without cable retraction unit
Measurement	MID DC Meter (Optional)
Mechanical Details	
Mounting Type	Base Mounted
Enclosure Material	Metal
Cable Management (Optional)	Cable Retraction
Dimensions (HxWxD)	Power Cabinet :2015.0 mm (H) x 1050.0 mm (W) x 1345.0 mm (D)
	Dispenser Unit: 2056.0 mm (H) x 637.0 mm (W) x 422.0 mm (D)
Weight	(without cable retraction unit holders)
	Power Cabinet: 980 kg
Weight	Dispenser Unit: 300 kg
Electrical Data OF Power Cabinet	
Max. Output Power	720 kW
Input Rating	400 Vac ±10 % , 50 Hz , 1150 A / phase
Output Voltage	200-920V
Output Current	750 A (Lower current levels can be provided by the power unit according to the
	dispenser specifications.)
Power Factor, Efficiency	> 0.98, > 95 %
Noise Level	< 80 dBA avg. from 1m distance from front @25° C
Earthing System	3L+N+PE (TN, TT)
IEC Protection Class	Class I
Internal Protections	Over current / Over voltage / Under voltage / Short circuit / Over Temperature /
	Surge Protection

ALP DC SAT

Highlights

Electrical Data of Dispenser Unit	
Max. Output Power	720 kW
Input Rating	200 – 920 Vdc, 750 A per charging interface
Output Voltage	200 - 920 Vdc
Output Current	750 A
Noise Level	< 65 dBA avg. from 1m distance from front @25° C
IEC Protection Class	Class I
Internal Protections	RCBO Type-A for internal SELV circuit, Insulation monitoring for DC outputs , Over current / Over voltage / Under voltage / Short circuit / Over Temperature / Surge
	Protection (Type-1, Type-2)
Other Safety Features	Emergency Stop button (optional), Tilt sensor, Door Switches, Upstream Protection
	Trip (NC)
Built-in metering	DC meter in accordance with IEC 62052-11:2020
Power Sharing	Dynamic power allocation with 80 kW steps between sockets
Connectivity	
Communication interface to IT backend	OCPP 1.6 J, OCPP 2.0.1 (via OTA Update)
Protocols for communication with IT backend	Ethernet
	GSM 900/1800
Protocols for communication with IT backend	UMTS 900/2100
	LTE Band 1/3/7/8/20/28A
Authentication methods	RFID (ISO-14443A/B and ISO-15693)
	AutoCharge using MAC
User Interface	ISO 15118-2 Plug&Charge
	Contactless Credit Card Reader with PIN on Glass (Optional)
Display	Capacitive Touch Screen
Display	27” Color TFT LCD

ALP DC SAT


Highlights

Certification	
IP protection class	IP54
Impact resistance	IK10
Approvals	CE, RoHS, REACH, GPSD, WEEE
Standards	IEC 62196-1 / 3 / 3-1, IEC 61851-1 / 23 / 24, ISO 15118-1 / 2 / 3 / 20, DIN 70121,
	IEC 61851-1 / 23 / 24, IEC 61851-21-2, EN 60068-2-1, EN 60068-2-14, EN
	60068-2-2, EN 60068-2-3, IEC 61000-4-5, IEC 61000-4-11, IEC 61000-4-2, VES
	30 431, VES 30 404, VES 30 422, VES 30 407, VES 30 439, EN 60068-2-6
Environmental conditions	
Environmental operating temperature	-35°C to + 55 °C (Derating is applied over + 45 °C)
Humidity	5 % - 90 % (Relative humidity, non-condensing)
Cooling	Power Cabinet : Forced Air Cooling Fan
	Dispenser Unit : Cable Cooling (Liquid Cooled Cable Using Passive Heat Exchanger with Fan)(Optional)
Areas of use	Internal & External areas
Operating altitude above sea level	0 - 2000m

ALP DC SAT

Highlights

Technical drawing

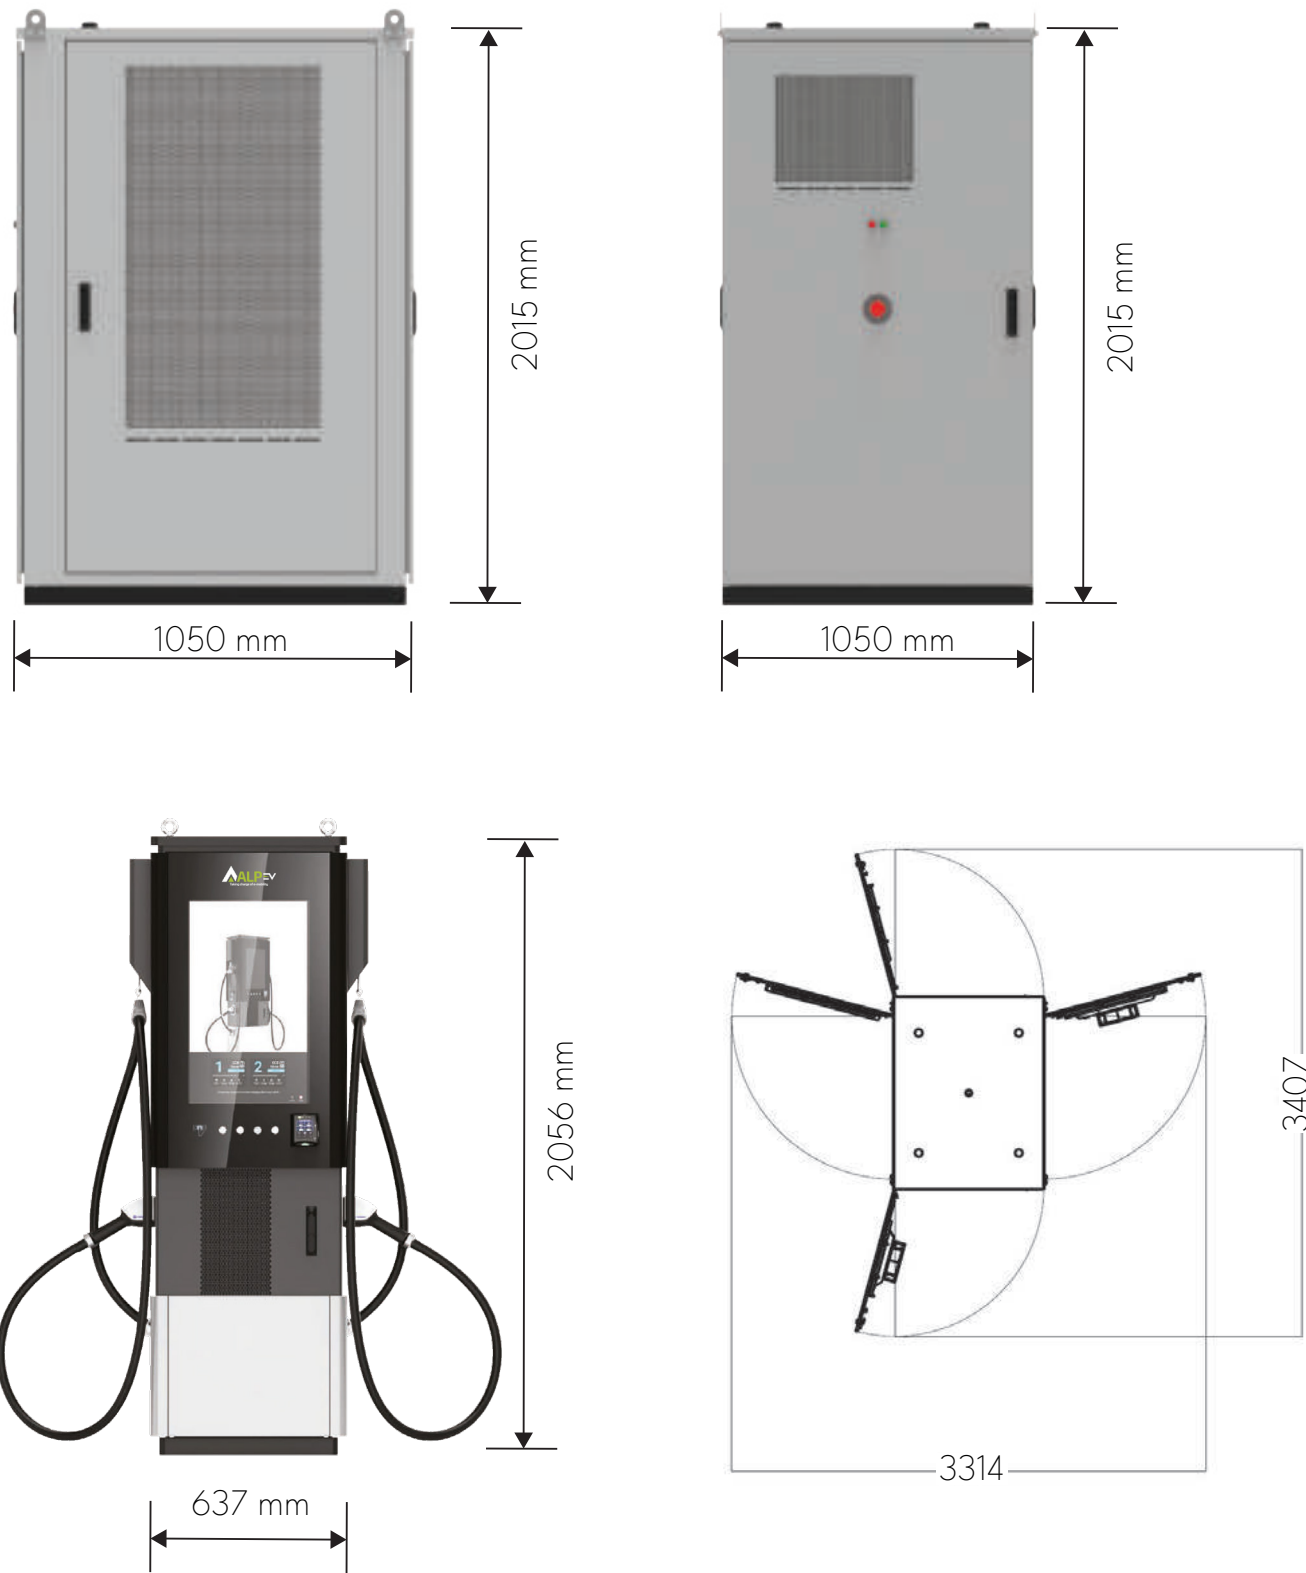

CHARGING SOLUTIONS

Carefree electric driving with
the smartest charging solutions



Leursebaan 266, 4814 RE Breda, The Netherlands

sales@alp-ev.com | +31(0)85-2465771



www.alp-ev.com



Distributeur: VDH Solar Groothandel B.V.

Finlandlaan 1, 2391 PV Hazerswoude-Dorp, Holland

+31 (0)172 235 990 | info@vdh-solar.nl | www.vdh-solar.nl